
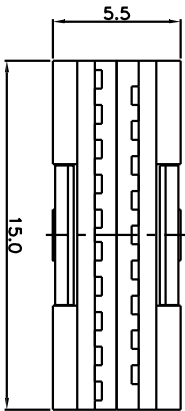
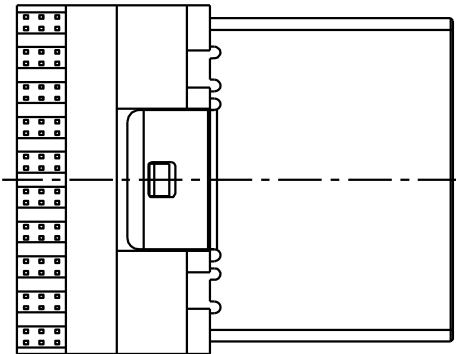
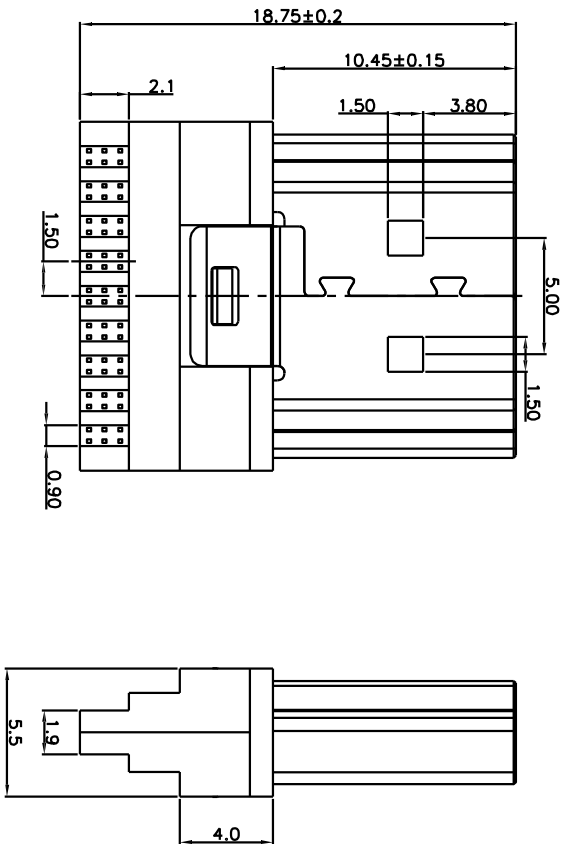


RoHS Compliant

CUSTOMER DRAWING

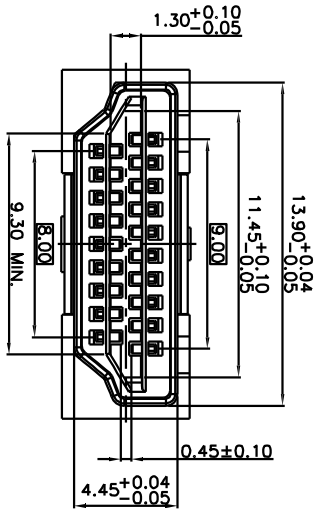

- NOTES:
- MATERIAL:
HOUSING&COVER: THERMOPLASTIC HIGH-TEMP UL94V-0 COLOR: BLACK.
CONTACT: COPPER ALLOY
SHELL: COPPER ALLOY&SPCC
 - FINISH:
CONTACT: Au SEE TABLE 2.
80U~120U: Tin PLATE ON SOLDER TAIL AREA.
50U~80U: Ni BASE-PLATE OVER ALL.
SHELL: SEE TABLE 3
 - SPECIFICATION:
3.1: ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING: 0.5A MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 300V AC
INSULATION RESISTANCE: 0.1MΩ MIN. AT 500V/DC
b.MATE 10MΩ MIN. AT 150V/DC
CONTACT RESISTANCE: 10mΩ MAX.
TEMPERATURE RANGE: -20℃ TO +85℃
3.2: MECHANICAL:
INSERTION FORCE: 44.1N MAX.
WITHDRAWAL FORCE: 9.8N MIN. 39.2N MAX.
DURABILITY: 10,000 CYCLES

TOLERANCES UNLESS OTHERWISE SPECIFIED				Zuanbao Electronics Co., Ltd.			
X	±0.30	DESIGN:	DATE:	HDMI-19P01			
X.X	±0.20	CHECKED:	DATE:	SCALE: 1:1			
X.XX	±0.15	APPROVED:	DATE:	UNIT: mm			
X.XXX	±0.05			SHEET: 1/1			
ANGEL	±1°			SIZE: A4			
MATERIAL:				REV: A			
FINISH:							
ECN NO	REV	DATE	DESCRIPTION	CHANGED	APPROVED		
	A	10.05.17	RELEASE	JAMES			